


# EPSILON 2600 - DIN, electrical



## ZOELLER-EPSILON System 2600 – The split automatic lifter with 24V electric drive

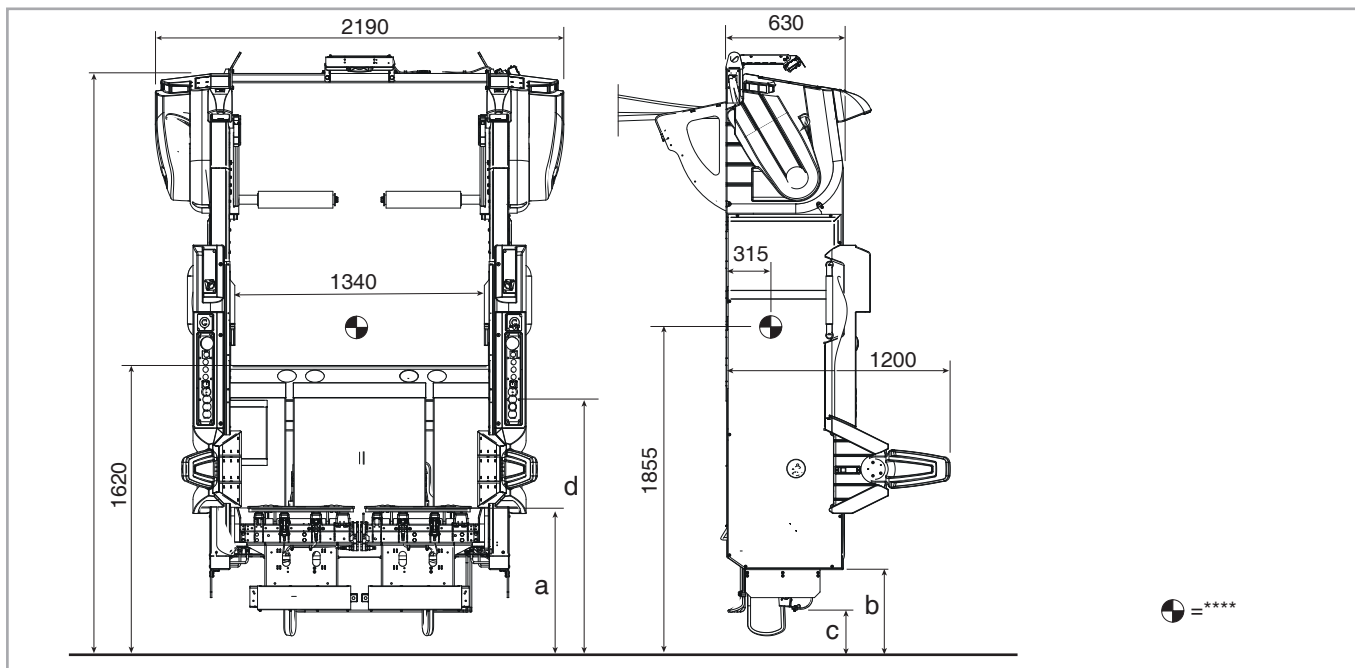

### Legend

- \* Cycle time (without dwell time) depends on installation height and container size.
- \*\* Lifting and tipping capacities refer to max. use of container capacity with a refuse density acc. to standard.
- \*\*\* Data relating to working area without container.
- \*\*\*\* Position of lifter gravity centre with swinging units in lowered position.

- b) Container pick up via comb
- c) depends on lifter equipment

© by ZÖLLER-KIPPER GmbH • As of: 11/2022  
 Technical data subject to modification without prior notice.

Container types	Cont.	Cont.	Cont.	Cont.
Specification in acc. with model list	80/120 I	140/240/340 I	500-1200 I	770-1300 I
Special containers on request	EN 840-1	EN 840-1	EN 840-2 <sup>b)</sup>	EN 840-3 <sup>b)</sup>
Lifter dimensions in mm				
a Setting height	820	900	900	900
b Ground clearance	370			
c Ground clearance, Swinging unit	300	380	380	380
d Installation height (support strip)	1420			
Technical data				
Cycle time *	app. 5-7 s	app. 5-7 s	app. 10-12 s	app. 10-12 s
Lifting and tipping capacities **	2x1500 N	2x1500 N	5000 N	5000 N
Noise level *** approx.	60 dB(A)			
Operating voltage	24 V			
Weight <sup>c)</sup>	app. 690 kg			

