


EPSILON 2620 -integrated, electrical



ZOELLER-EPSILON System 2620 – The integrated, split automatic lifter with 24V electric drive

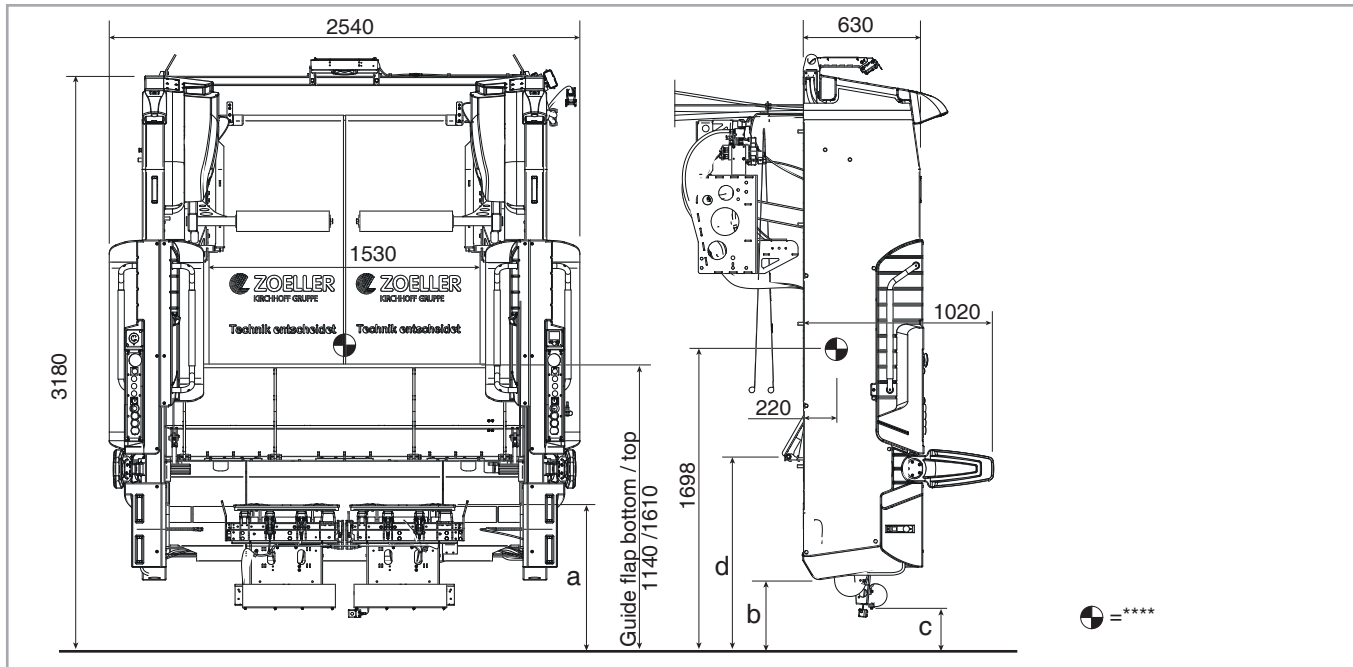

Legend

- * Cycle time (without dwell time) depends on installation height and container size
- ** Lifting and tipping capacities refer to max. use of container capacity with a refuse density acc. to standard.
- *** Data relating to working area without container
- **** Position of lifter gravity centre with swinging units in lowered position.

°) without container retention and depends on lifter equipment

© by ZÖLLER-KIPPER GmbH • As of: 05/2022
 Technical data subject to modification without prior notice.

Container types	Cont.	Cont.	Cont.	Cont-
Specification in acc. with model list Special containers on request	80/120 I EN 840-1	140/240/340 I EN 840-1	500-1200 I EN 840-2	770-1300 I EN 840-3
Lifter dimensions in mm				
a Setting height	820	900	900	900
b Ground clearance	370			
c Ground clearance, swinging unit	300	380	380	380
d Installation height (support strip)	1100			
Technical data				
Cycle time *	appr. 5-7 s	appr. 5-7 s	appr. 10-12 s	appr. 10-12 s
Lifting and tipping capacities **	2x1500 N	2x1500 N	5000 N	5000 N
Noise level *** approx.	60 dB(A)			
Operating voltage	24 V			
Weight °)	appr. 720 kg			

