


ZOELLER-DELTA-2342-PREMIUM – The automatic specialist lifter

Container types		
Container range depending on model	Wheeled bin	Wheeled bin
Specification in accordance with model list	80/90/120 l	140/240/340/360 l
Special containers upon request	EN 840-1	EN 840-1
Lifter dimensions in mm		
a Setting height	820	900
b Ground clearance lifting carriage	300	380
c Ground clearance swinging arm	345-800	345-800
d Installation height	1150-1600	1150-1600
e Ground clearance support	165-380	245-380
Technical data		
Cycle time*	6-8 s	6-8 s
Lifting and tipping capacities**	2x1500 N	2x1500 N
Noise level***	70 dB (A)	70 dB (A)
Hydraulic flow at coupling	38-45 l/min	
Compressed-air connection	4-6 bar	
Operating pressure	180 bar	
Operating voltage	24 V	
Weight	app. 680 kg	

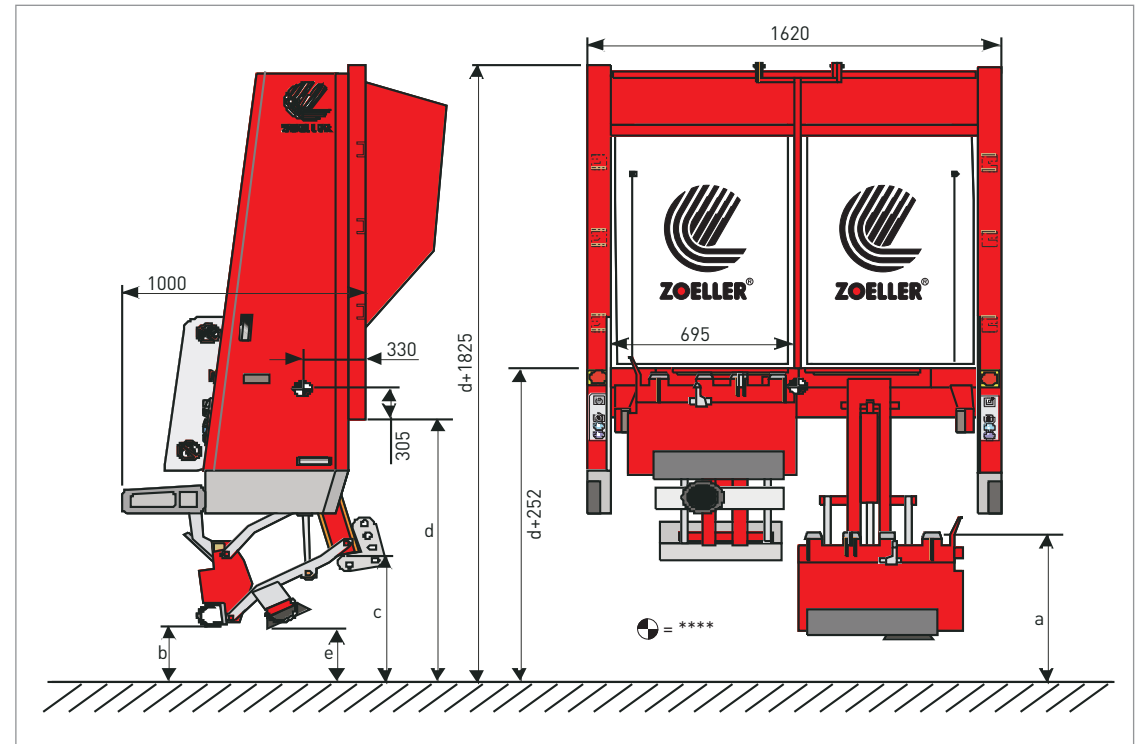

Legende

- * Cycle time (without dwell time) depends on installation height, container size and oil viscosity.
- ** Lifting and tipping capacities refer to maximum use of nominal container capacity with a refuse density acc. to standards.
- *** Data relating to working area w/o container.
- **** Position of lifter gravity centre with lifting carriages abutting on swinging arm.